



EXY-16FZ09-FTx

Full Titanium Exhaust System YAMAHA 2014-2016 FZ-09, 2015-2016 FJ09, 2016 XSR900

PARTS LIST

Head Pipes	3	Springs	7	Lock Nut	1
Tail Pipe	1	Silencer	1		

*New OEM exhaust gaskets (**NOT PROVIDED**) are recommended whenever installing or re-installing an exhaust system.

**<<<<INSTALLATION OF THIS PRODUCT SHOULD BE PERFORMED BY A QUALIFIED TECHNICIAN >>>>
<<<<<PLEASE READ INSTRUCTIONS CAREFULLY BEFORE BEGINNING INSTALLATION >>>>>**

1. Please make sure the bike is cooled down before trying to remove or install any exhaust.
2. Remove the stock exhaust (refer to the Yamaha service manual). Keep the 2 bolts, 1 outside silver washer, and one of the black hat washers that were used for mounting the OEM catalytic converter, as well as the nuts securing the OEM head pipes, for installing the new system.
3. Remove the O2 sensor from the stock system and keep it for re-installation.
4. Install the O2 sensor onto the Graves collector. **PHOTO 1**
5. Install the head pipes using new gaskets. Hold the system up with one hand secure all the flanges with the OEM nuts with the other. Leave the nuts finger tight for now. **PHOTO 2**



PHOTO 2

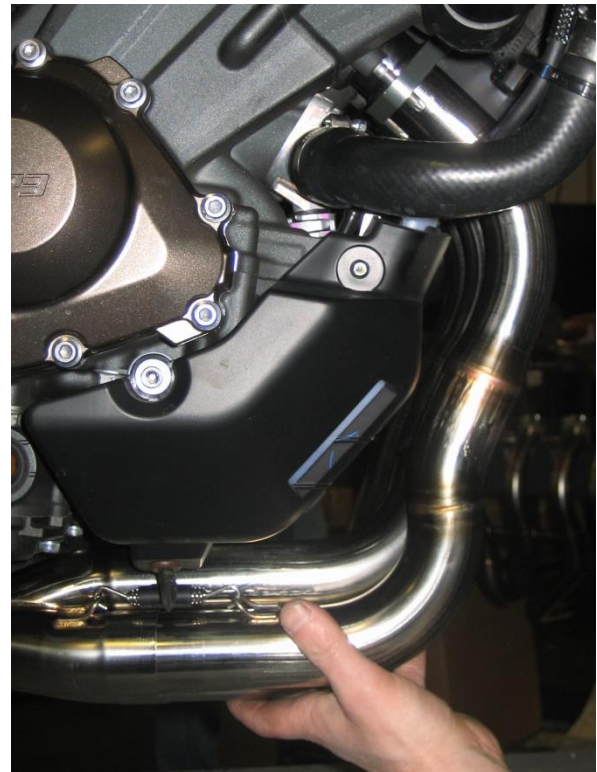


PHOTO 1



- Slide the Silencer onto the tailpipe until it stops. Align the hanger mount on the silencer behind the rubber mount on the frame. Slide the stock bolt and washer through the rubber mount on the frame. Use the supplied nyloc nut and stock washer left over from the left side stock exhaust mount. Use an open end wrench to hold the lock nut and torque the bolt to 24.4Nm/18Ft.lbs. **PHOTO 3**



PHOTO 3

- Torque the head pipe nuts to 20 N.m. (14 ft. lbs.) and install springs.
- Check the alignment of the system and all the clearances. Be sure to wipe all dirt and fingerprints from the exhaust system before starting the motorcycle.

Also available for the Yamaha FZ-09:



FZ-09 Frame Slider Kit

FZ-09 FSY-14FZ09-K



Fender Eliminator

FEY-14FZ09-K

***And for your new 2016 YAMAHA
XSR900***



Fender Eliminator

FEY-16XSR9-K